


YP30T

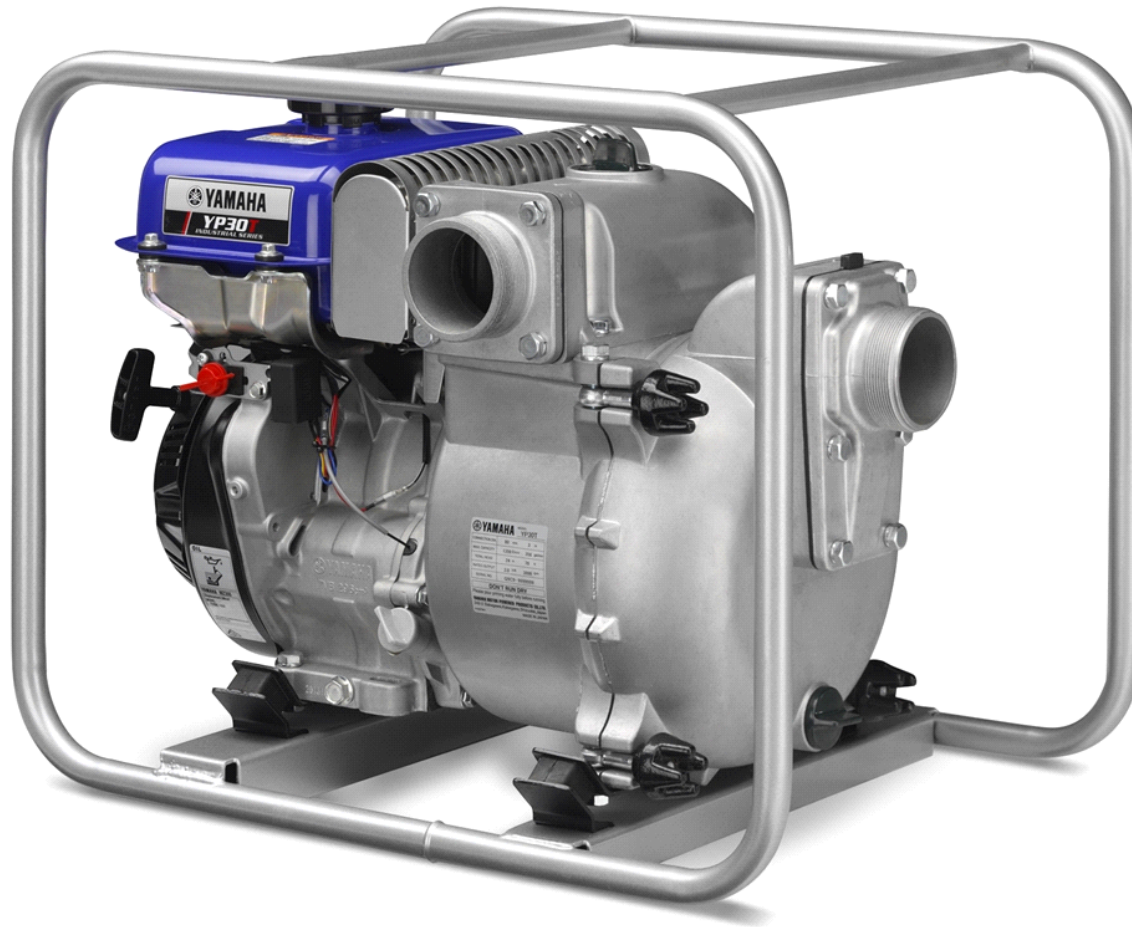

Blue
\$1,349 MSRP*

TOP FEATURES

1. The YP30T uses a 296cc, OHV 4-stroke engine that is quieter, more powerful, and consumes less fuel than comparable engines.
2. Delivers a 79-foot total head, with a 26-foot suction head.
3. Can handle solids up to 1 1/16" (27 mm).
4. Durable Pump - Impeller and volute case are cast iron for greater strength and durability; and they withstand wear from grit, sand, silt, etc.
5. Outstanding Seal Durability - Newly adopted Japanese-made silicone carbide (SIC) seal - has better durability compared to conventional carbon ceramic seals.
6. 3-inch Standard National Pipe Thread (NPT) fittings connect easily with the suction and discharge hoses.
7. 3 year industrial and residential warranty with optional Y.E.S. for customer peace of mind.



*Manufacturer's Suggested Retail Price (MSRP) shown. Does not include tax, title, prep or destination charges. Actual prices set by dealer.

FEATURES & BENEFITS

FEATURES

DeWatering Applications - Use for these types of DeWatering applications: Job site excavations, Utility vaults, Motocross tracks, Mining sites, Lakes and ponds and Barge holds.

Powerful Pump - Pumps up to 356 gal/min (21,360 gal/hr). Use for moving massive amounts of water.

Cast iron cylinder lining — Cast iron cylinder lining has optimal heat dissipation.

Automatic oil warning system shuts off engine before oil level is low — Prevents engine damage, avoids costly repairs, minimizes down time, enhances long term durability.

Transistorized ignition provides lean, efficient spark — Maintenance-free and ensures fast, easy starting, reliable operation.

Auto-decompression — Automatically “opens” exhaust valve to reduce compression for easier starting.

EPA Emission Engine Life Rating — The YP30T meets the strictest environmental standards - EPA and CARB.

Tool and Strainer Kit - Standard equipment.

yamahamotorsports.com
For Accessories, visit shopyamaha.com

SPECIFICATIONS:

Pump Type	Self-priming, Centrifugal
Suction Port	3 in
Discharge Port	3 in
Discharge Capacity	356 gal / min
Self Priming Time	100 sec / 26.25 ft
Total Head Lift	79 ft
Suction Head Lift	26 ft
Solids Handling (Max)	1 1/16 in (27mm)
Engine	MZ 300 4-stroke, OHV, Forced air cooled
Fuel	Unleaded Gasoline
Fuel Capacity	1.45 gal
Starting Method	Recoil Starter
Dry Weight	138 lb
L x W x H	26.97 × 19.88 × 21.85 in
Limited Warranty	3 years
Color	Blue